

CORROSION RESISTANCE CHART 耐藥品性一覽表

CHEMICAL NAME 藥品名	CONCENTRATION 濃度 %	TEMPERATURE 溫度 °C	BODY MATERIAL 泵浦本體材質			SEAL MATERIAL 密封材質			RUBBER MATERIAL 橡膠材質		
			FRPP	CFRPP	PVDF	Ceramic	Carbon	Sic	NBR	EPT	VITON
H ₂ SO ₄ Sulfuric acid 硫酸 H ₂ SO ₄	30	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
	60	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
98	40	●	●	●	●	●	●	●	●	●	
	60	●	●	●	●	●	●	●	●	●	
	80	●	●	●	●	●	●	●	●	●	
HCL Hydrochloric acid 鹽酸 HCL	15	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
	32	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
CrO ₃ Chromic acid 鉻酸 CrO ₃	20	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
HNO ₃ Nitric acid 硝酸 HNO ₃	20	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
	50	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
H ₃ PO ₄ Phosphoric acid 磷酸 H ₃ PO ₄	25	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
	50	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
NaOCl Sodium Hypochlorite 次氯酸鈉 NaOCl CH ₃ COOH Acetic acid 醋酸 CH ₃ COOH	10	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
	25	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
HF Hydrofluoric acid 氫氟酸 HF HCl+HNO ₃ Aqua regia 王水 HCl+HNO ₃ H ₂ O ₂ Hydrogen peroxide 雙氧水 H ₂ O ₂	25	40	x	●	●	x	●	●	●	●	●
		60	x	●	●	x	●	●	●	●	●
		80	x	●	●	x	●	●	●	●	●
	3.1	40	x	●	●	x	●	●	x	●	●
		60	x	●	●	x	●	●	x	●	●
		80	x	●	●	x	●	●	x	●	●
10	40	●	●	●	●	●	●	●	●	●	
	60	●	●	●	●	●	●	●	●	●	
	80	●	●	●	●	●	●	●	●	●	
NaOH Caustic soda 氫氧化鈉 NaOH FeCl ₃ Ferric chloride 氯化鐵 FeCl ₃ Cu(CN) ₂ Copper Cyanide 氰化銅 Cu(CN) ₂ Zn Cl ₂ 氯化鋅 Zinc Chlorate Zinc Chlorate NiSO ₄ 硫酸鎳 Nickel Sulfate	45	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
	40	40	●	●	●	●	●	●	●	●	●
		60	●	●	●	●	●	●	●	●	●
		80	●	●	●	●	●	●	●	●	●
60	40	●	●	●	●	●	●	●	●	●	
	60	●	●	●	●	●	●	●	●	●	
	80	●	●	●	●	●	●	●	●	●	

● EXCELLENT 優 ○ GOOD 良 △ NOT GOOD 不良 × BAD 差 * Specifications and other features are subject to change without notice.
* 本公司對產品規格、設計特性均不圖研究改進，上述規格若有變更，恕不另行通知。



日益電機股份有限公司 ZIYELECTRICALENGINEERINGCO.,LTD.
國寶開發實業有限公司 KUOBAODEVELOPMENTANDTENTCO.,LTD.
日勝科技有限公司 ZISHENG TECHNOLOGICAL CO.,LTD.

總公司：台灣省台中縣烏日鄉大同五路51號
HEAD OFFICE: NO. 51 Da Tong Str. Wu Zi Village 414, Taichung County, Taiwan
工廠：台灣省台中縣烏日鄉五光路746巷20號
FACTORY: NO.28, Lane 746, Wuguang Rd., Wu Zi Village 414, Taichung County, Taiwan
TEL: 886-4-23384262 / 23389123 / 23384675 / 23384142
FAX: 886-4-23375335

北區分公司：台灣省桃園縣龜山鄉忠義路三段199號D棟
TEL: 886-3-3270698 / 3270699 / 3270700
FAX: 886-3-3270697
E-mail: kuobao@so-net.net.tw
http://www.kuobao-intl.com.tw

日益電機（昆山）有限公司
昆山廠：江蘇省昆山市石牌鎮中華路北側
TEL: 0512-57688841 * 2 FAX: 0512-57688843

日益電機（東莞）有限公司
廣東廠：廣東省東莞市沙田鎮穗豐年村秋區工業區
TEL: 0769-8861901 * 2 / 8867791 * 3 / 8880781 * 3
FAX: 0769-8861903
泉州服務站：福建省泉州市清濛工業區德泰路益龍花園9樓303室
TEL: 15960288782 FAX: 0595-22495905
嘉興服務站：浙江省嘉興市大禹鎮運溪花園20樓-單元102室
TEL: 15957735026 FAX: 0576-86180967
寧波服務站：浙江省寧波市海曙路2068弄2號1006室
TEL: 15805862602 FAX: 0274-87928653
天津服務站：天津市北辰區辰昌路3號延長樓高山水花園8樓2號門102室
TEL: 13820276566 FAX: 022-26679510

※版權所有 翻印必究※

KB SERIES / KCL SERIES
COAXIAL VACUUM ACID / ALKALINE-RESIST PUMP
CONNECTING AND SELF-PRIMING CHEMICAL PUMP

- ACID/ALKALINE-RESISTANT PUMP
- FILTERING MACHINE
- CHEMICAL MACHINERY
- VALVE ACCESSORIES

... The World of Teflon That is Acid and Alkaline Proof ...

... 讓氟塑料的世界，耐酸鹼的權威 ...



A combination of theorem and extensive experience.


A new level of pump performance.



Zi Yi ELECTRICAL ENGINEERING CO., LTD. is an expert in design, and manufacturing of a wide variety of acid/alkaline, and chemical resistant pump. Based on the years of total dedication to the research of pump performance and chemical composition, in incorporating with the extensive experience and theoretical basis, enabled Zi Yi pumps to be a new standard. The outstanding engineering capability from Zi Yi will offer the innovative and dependable pumps to meet your requirements.....

**融合理論與實務經驗
展現泵浦性能新境界**

專業設計，開發製造各式耐酸鹼化學性泵浦之Zi Yi 電機股份有限公司，秉持多年來矢志鑽研泵浦特殊及化學成份，其卓越傑出的經驗與理論基礎，Zi Yi 公司為高級過濾機及泵浦之新典範。Zi Yi 公司渾厚的技術背景，將為您提供創新信賴的過濾機及泵浦。

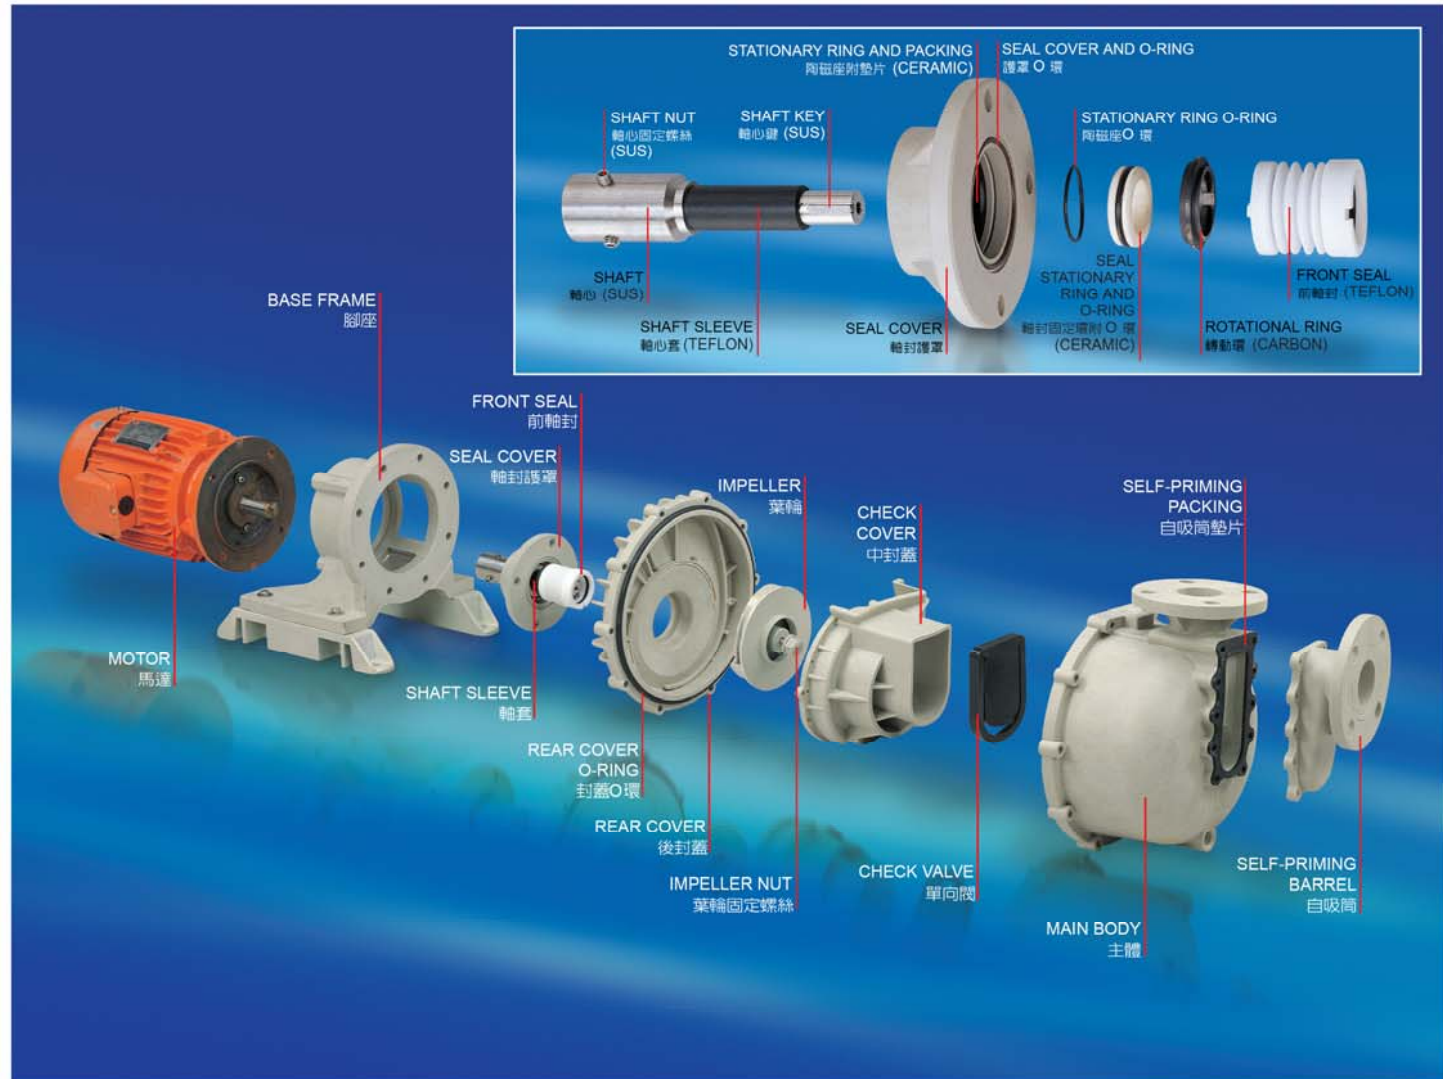

**Superior quality of pump body.
One piece injected without welding.**

超質泵浦主體結構，前所未有品質，一體射出成型無須焊接。



**Unmatched Quality.
Unmatched Performance..**

卓越品質。一般廠牌難與抗衡。



The pump body is manufactured from PVDF and CFRPP, FRPP. The body and upper self-priming barrel are one piece injected without welding, for leakfree performance.

泵浦主體採用 PVDF、CFRPP、FRPP 材質，主體與上方自吸筒一體射出成型，決無任何焊接點，所以決不洩漏。



The front self priming barrel is manufactured from PVDF and CFRPP, FRPP. The flange and front self priming barrel are one piece injected without welding that greatly upgrades durability, and ensures leakfree performance.

前自吸筒採 PVDF、CFRPP、FRPP 材質，自吸筒與法蘭一體射出成型，決無焊接，更強化本產品耐用性，所以決不洩漏。



The conventional method is to weld the upper self priming barrel on the pump body, which may cause leakage at the welded position.

傳統式泵浦，主體與自吸筒採焊接方式，長時間使用焊接處容易造成洩漏情形。



The conventional method is to weld the flange on the front self priming barrel, that may cause leakage and poor durability, and seal damage due to dry running.

一般型，自吸筒與法蘭乃須焊接，耐用性欠佳，容易造成洩漏現象，以至產生入口空轉損害軸封。



POOR SELF PRIMING BARREL

- The self priming barrel can't be sealed with pump body. An additional screw shall be fitted in the inlet port for sealing purpose.
- In case of over-tightening of screw may cause glue on screw peeling off.
- If screw fall into the pump, it needs to dispatch the pump and reassemble.

設計不良之自吸筒

- 自吸筒無法與泵浦主體完全密合，必須在入口內，加裝一枚螺絲，以達完全密合之效果。
- 當螺絲旋轉過緊，可能造成螺絲上之膠質脫落。
- 組裝過程中，如螺絲掉入泵浦內，必須花費較多工時將泵浦重新拆開，取出螺絲重組。

KB SERIES 同軸自吸式耐酸鹼泵浦
COAXIAL VACUUM ACID/ALKALINE-RESIST PUMP

KCL SERIES 連接自吸式耐酸鹼泵浦
CONNECTING AND SELF-PRIMING CHEMICAL PUMP

KB / KCL	40	02	2	N	B	L	C	C	H
1	2	3	4	5	6	7	8	9	10
KB / KCL-TYPE KB/KCL-MATERIAL FRPP KBC/KCLC-MATERIAL CFRPP KBP/KCLP-MATERIAL PVDF 機型編號 KB/KCL-泵浦材質 FRPP KBC/KCLC-泵浦材質 CFRPP KBP/KCLP-泵浦材質 PVDF	IN-OUTLET 40-1-1/2" 50-2" 75-3"	POWER 11-1 Ø 1/2HP 13-3 Ø 1/2HP 01-3 Ø 1HP 02-3 Ø 2HP	POLE 2-2P 4-4P 極數	RUBBER MATERIAL N-NBR E-EPT V-VITON 橡膠材質	B-NON CHECK-VALVE (INLET LOWER THAN LIQUID LEVEL) A-WITH CHECK-VALVE (INLET HIGHER THAN LIQUID LEVEL) B-無單向閥 (入口比液位低適用) A-有單向閥 (入口比液位高適用)	L-LOW HEAD H-HIGH HEAD L-低揚程 H-高揚程	STATIONARY RING C-CERAMIC S-SIC 固定環	ROTATIONAL RING C-CARBON S-SIC 轉動環	SPRING H-HASTELLOY-C S-SUS316 彈簧




KB SERIES TYPE



KCL SERIES TYPE



PUMP APPLICATION EXAMPLES 泵浦典型應用例

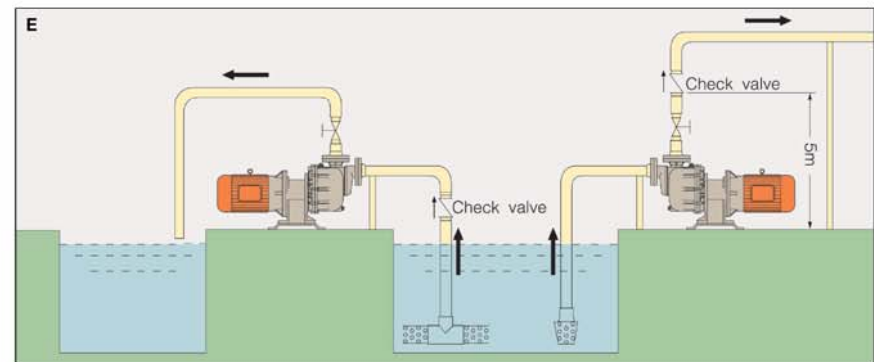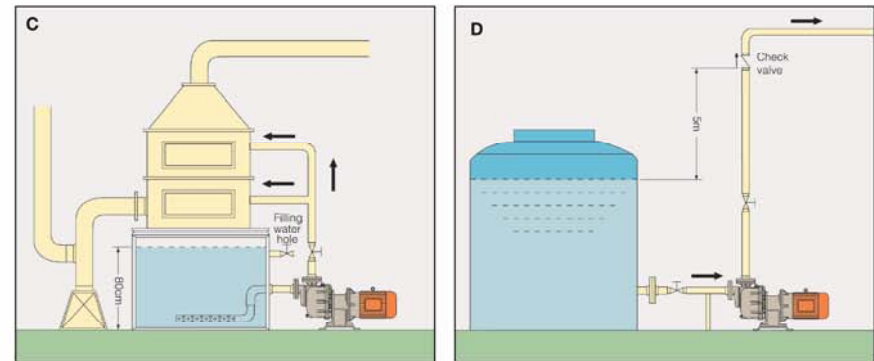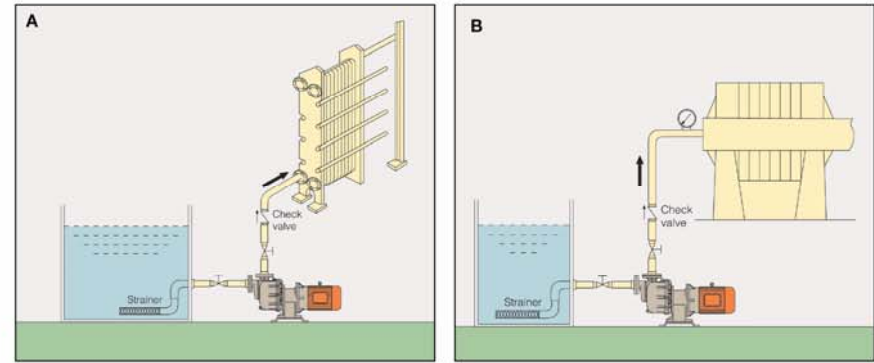

KB series

同軸自吸式耐酸鹼泵浦

COAXIAL VACUUM ACID / ALKALINE-RESIST PUMP

FEATURES:



- Specially designed cooling for shaft seal. The built-in teflon bellow seal features automatic cooling performance without use of circulated cooling hose.
- Vacuum self priming design. Extremely powerful self priming force. Built with a choke valve fully prevents liquid back-flow in the pump.
- Superior corrosion-resistant performance. Material- CFRPP - FRPP - PVDF (Teflon.)
- It resists strong acid and alkaline.

特點:

- 獨特的軸封設計 - 內裝式採用 Teflon Bellow Seal 自冷式設計 - 無需冷卻循環管回路。
- 自吸式設計 - 自吸力特別強勁自吸式可達20ft，並有止回閥設計，防止泵內液體回流。
- 抗腐性強，材質CFRPP、FRPP、PVDF (鐵弗龍)。
- 耐強酸、耐強鹼。



KB PERFORMANCE CURVE CHART KB性能曲線圖

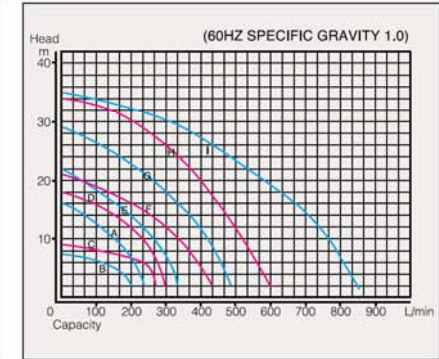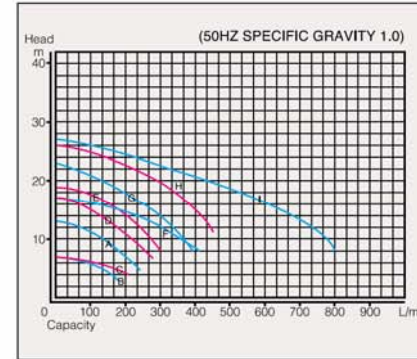

KB SERIES SPECIFICATIONS KB系列規格

Model 型式	CURVES NO. 曲線號碼	Full head (M) 全揚程	Full flow amount (L/MIN) 全流量	Head(M) 揚程	Flow amount (L/MIN) 流量	In/out diameter (mm/m) 入口+出口 (口徑)	Power 動力 No. of phase 相數 No. of charge 極數 Horse power 馬力	Weight (Kg) 重量
Frequency: 50HZ								
KB-40011L	B	7	185	5	135	40/40	1Ø 4 1/2	27
KB-40012L	A	13	240	6	220	40/40	3Ø 2 1	26
KB-40013L	B	7	185	5	135	40/40	3Ø 4 1/2	27
KB-40014L	C	7	210	5	150	40/40	3Ø 4 1	29
KB-40022L	D	17	280	10	215	40/40	3Ø 2 2	30
KB-40022H	E	19	300	12	230	40/40	3Ø 2 2	34
KB-50032L	F	17	410	12	300	50/50	3Ø 2 3	38
KB-50032H	G	23	390	14	300	50/50	3Ø 2 3	42
KB-50052H	H	26	450	15	400	50/50	3Ø 2 5	54
KB-75052H	I	27	800	20	430	75/75	3Ø 2 5	96
Frequency: 60HZ								
KB-40011L	B	7.5	200	5	150	40/40	1Ø 4 1/2	27
KB-40012L	A	16	240	10	150	40/40	3Ø 2 1	26
KB-40013L	B	7.5	200	5	150	40/40	3Ø 4 1/2	27
KB-40014L	C	9	270	6	240	40/40	3Ø 4 1	29
KB-40022L	D	18	300	10	230	40/40	3Ø 2 2	30
KB-40022H	E	22	330	12	230	40/40	3Ø 2 2	34
KB-50032L	F	21	430	12	300	50/50	3Ø 2 3	38
KB-50032H	G	29	480	18	300	50/50	3Ø 2 3	42
KB-50052H	H	34	600	20	400	50/50	3Ø 2 5	54
KB-75052H	I	35	860	20	580	75/75	3Ø 2 5	96

KCL series

連接自吸式耐酸鹼泵浦

CONNECTING AND SELF-PRIMING CHEMICAL PUMP

FEATURES:



- Specially designed cooling for shaft seal. The built-in teflon bellow seal features automatic cooling performance without use of circulated cooling hose.
- Vacuum self priming design. Extremely powerful self priming force. Built with a choke valve fully prevents liquid back-flow in the pump.
- Superior corrosion-resistant performance. Material- CFRPP · FRPP · PVDF (Teflon.)
- It resists strong acid and alkaline.

特點:

- 獨特的軸封設計 - 內裝式採用 Teflon Bellow Seal 自冷式設計。無需冷卻循環管回路。
- 自吸式設計 - 自吸力特別強勁自吸式可達20吋，並有止回閥設計，防止泵內液體回流。
- 抗腐性強。材質CFRPP · FRPP · PVDF (鐵弗龍)。
- 耐強酸、耐強鹼。



KCL PERFORMANCE CURVE CHART KCL性能曲線圖

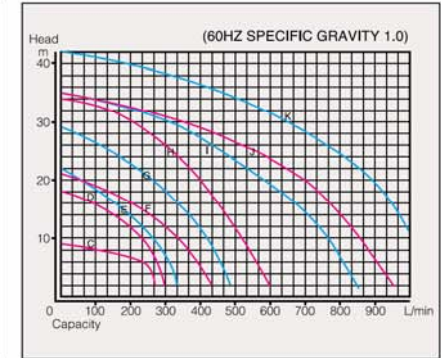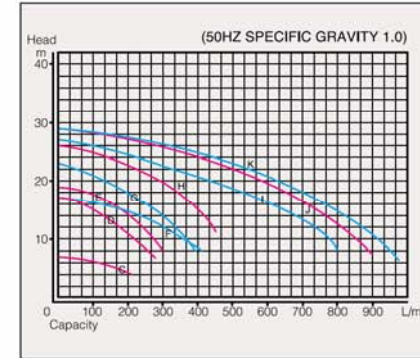

KCL SERIES SPECIFICATIONS KCL系列規格




Model 型式	CURVES NO. 曲線號碼	Full head (M) 全揚程	Full flow amount (L/MIN) 全流量	Head(M) 揚程	Flow amount (L/MIN) 流量	In/out diameter (m/m) 入口+出口(吋)	Power 動力			Weight (KG) 重量
							No. of phase 相數	No. of charge 極數	Horse power 馬力	
Frequency: 50HZ										
KCL-40014L	C	7	210	5	150	40/40	3Ø	4	1	45
KCL-40022L	D	17	280	10	215	40/40	3Ø	2	2	53
KCL-40022H	E	19	300	12	230	40/40	3Ø	2	2	54
KCL-50032L	F	17	410	12	300	50/50	3Ø	2	3	74
KCL-50032H	G	23	390	14	300	50/50	3Ø	2	3	75
KCL-50052H	H	26	450	15	400	50/50	3Ø	2	5	93
KCL-75052H	I	27	800	20	430	75/75	3Ø	2	5	96
KCL-75072H	J	29	900	20	580	75/75	3Ø	2	7 1/2	112
KCL-75102H	K	29	980	20	620	75/75	3Ø	2	10	122
Frequency: 60HZ										
KCL-40014L	C	9	270	6	240	40/40	3Ø	4	1	45
KCL-40022L	D	18	300	10	230	40/40	3Ø	2	2	53
KCL-40022H	E	22	330	12	230	40/40	3Ø	2	2	54
KCL-50032L	F	21	430	12	300	50/50	3Ø	2	3	74
KCL-50032H	G	29	480	18	300	50/50	3Ø	2	3	75
KCL-50052H	H	34	600	20	400	50/50	3Ø	2	5	93
KCL-75052H	I	35	860	20	580	75/75	3Ø	2	5	96
KCL-75072H	J	35	960	20	700	75/75	3Ø	2	7 1/2	112
KCL-75102H	K	42	1000	20	890	75/75	3Ø	2	10	122

KB SERIES



CONSTRUCTION 零件圖表

NO	DESCRIPTION 名稱	MATERIAL 材質	NO	DESCRIPTION 名稱	MATERIAL 材質
1	MOTOR 馬達		6	MAIN BODY 主體	FRPP CFRPP PVDF
2	BASE FRAME 腳座	FC FRPP	7	SEAL COVER AND O-RING 軸封蓋罩封 O 環	FRPP CFRPP PVDF/NBR VITON
3	REAR COVER 後封蓋	FRPP CFRPP PVDF	8	STATIONARY RING AND O-RING 陶瓷環座封 O 環	PPS/ PVDF VITON
4	REAR COVER O-RING 封蓋 O 環	NBR EPT VITON	9	FRONT SEAL 前軸封	TEFLON
5-1	SHAFT SLEEVE 軸套	TEFLON	9-1	ROTATIONAL RING 轉動環	CARBON SIC
5-2	SHAFT 軸心	SUS	9-2	TEFLON BELLOWS 伸縮環	TEFLON
5-3	SHAFT NUT 軸心固定螺絲	SUS	9-3	SPRING 彈簧	SUS HC
5-4	SHAFT KEY 軸心鍵	SUS	9-4	FRONT O-RING 前 O 環	NBR VITON

NO	DESCRIPTION 名稱	MATERIAL 材質	NO	DESCRIPTION 名稱	MATERIAL 材質
9-5	PACKING 墊片	NBR VITON	15	WATER FILLING CAP AND O-RING 注水蓋封 O 環	FRPP CFRPP PVDF VITON
9-6	REAR O-RING 後 O 環	NBR VITON	16	SELF-PRIMING BARREL 自吸筒	FRPP CFRPP PVDF
10	SEAL STATIONARY RING AND O-RING 軸封固定環封 O 環	CERAMIC SIC NBR VITON	16S	SELF-PRIMING BARREL NUT 自吸筒固定螺絲	PVDF FRPP VITON
11	IMPELLER 葉輪	FRPP CFRPP PVDF	17	SELF-PRIMING PACKING 自吸筒墊片	NBR EPT VITON
12	IMPELLER NUT AND O-RING 葉輪固定螺絲封 O 環	FRPP PVDF NBR VITON	18	FRAME 腳架	FRPP
13	CHECK COVER 中封蓋	FRPP CFRPP PVDF			
13S	CHECK COVER NUT 中封蓋固定螺絲	SUS			
14	CHECK VALVE 單向閥	NBR EPT VITON TEFLON			

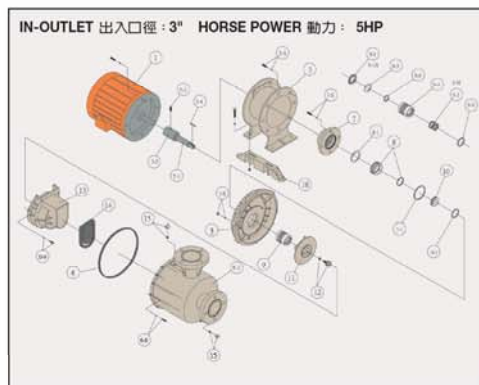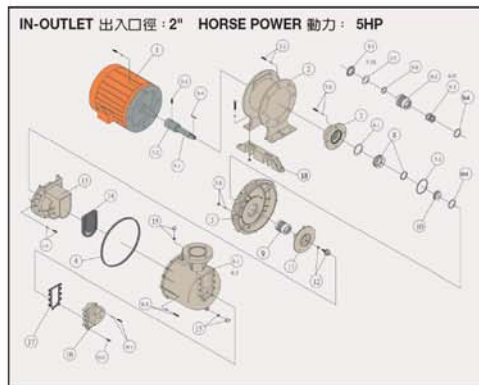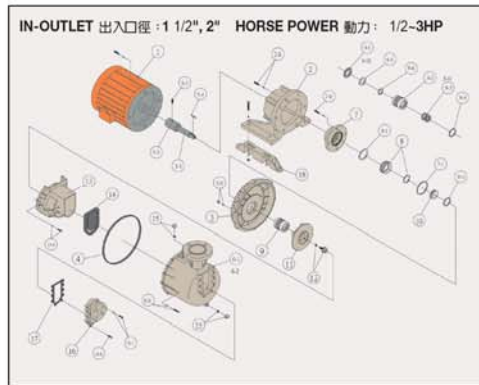



DIMENSION DRAWING

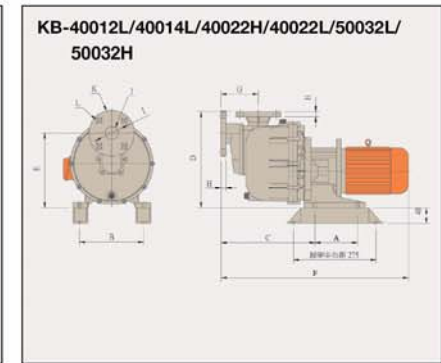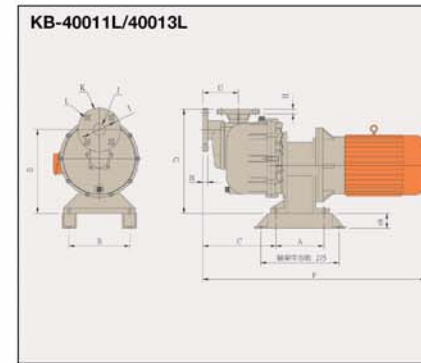

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
KB-40011L	150	203	317	322	245	636	130	16	Ø103	Ø40	Ø138	Ø20			
KB-40013L	150	203	317	245	245	626	130	16	Ø103	Ø40	Ø138	Ø20			

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
KB-40012L	142	214	320	322	250	626	130	16	Ø103	Ø40	Ø138	Ø20			
KB-40014L	142	214	320	322	250	626	130	16	Ø103	Ø40	Ø138	Ø20			
KB-40022H	142	220	320	322	250	705	130	16	Ø103	Ø40	Ø138	Ø20			
KB-40022L	142	220	320	322	250	705	130	16	Ø103	Ø40	Ø138	Ø20			
KB-50032L	142	214	320	322	250	705	130	18	Ø118	Ø50	Ø154	Ø20			
KB-50032H	142	214	320	322	250	705	130	18	Ø118	Ø50	Ø154	Ø20			

DIMENSION DRAWING

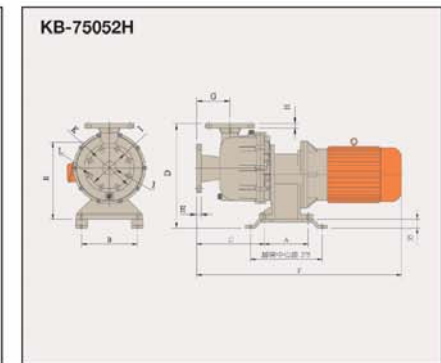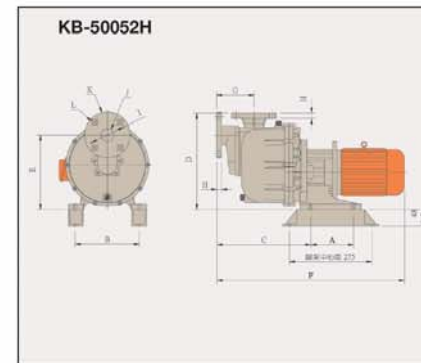


MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
KB-50052H	168	213	272	370	290	783	130	18	Ø118	Ø50	Ø154	Ø20			
KB-75052H	168	213	298	368	200	815	110	18	Ø150	Ø75	Ø185	Ø20			


KCL SERIES

CONSTRUCTION 零件圖表

NO	DESCRIPTION 名稱	MATERIAL 材質	NO	DESCRIPTION 名稱	MATERIAL 材質
1	MOTOR 馬達		5-1	SHAFT SEAL 蓋帽	TEFLON
2	BASE FRAME 腳座	FC FRPP	5-2	CONNECTION KEY 連軸器鍵 葉輪鍵	IRON SUS
2-1	FRAME BEARING 腳座培林	SC	6	MAIN BODY 主體	FRPP CFRPP PVDF
2-2	BEARING COBRT 培林防塵蓋	FC	7	SEAL COVER AND O-RING 軸封護罩附 O 環	FRPP CFRPP PVDF/VITON NBR
2-3	WATER DEFEND SEAK 培林防水蓋	PP	8	STATIONARY RING AND O-RING 陶瓷環座附 O 環	PPS PVDF VITON NBR
3	REAR COVER 後封蓋	FRPP CFRPP PVDF	9	FRONT SEAL 前軸封	TEFLON
4	REAR COVER O-RING 封蓋 O 環	NBR EPT VITON	9-1	ROTATIONAL RING 轉動環	CARBON SILICON
5	SHAFT 軸心	SUS TEFLON	9-2	TEFLON BELLOWS 伸縮環	TEFLON

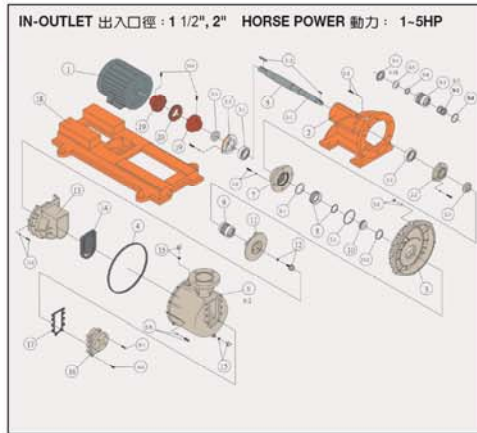


DIMENSION DRAWING

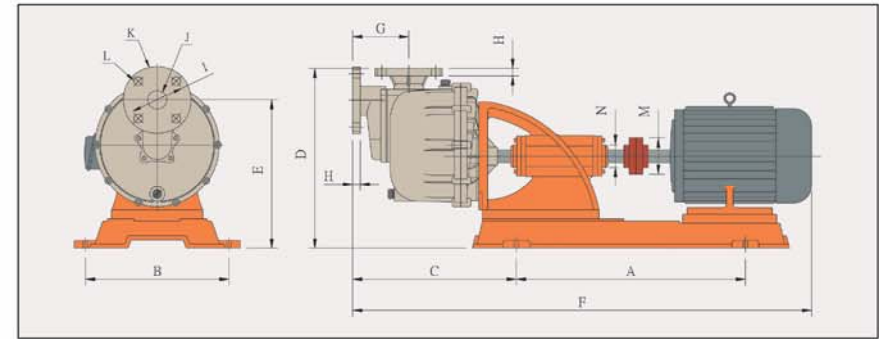


DIMENSION TABLE

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
KCL-40012L	512	310	373	386	316	970	130	16	Ø103	Ø40	Ø138	Ø20	Ø82	Ø53	
KCL-40014L	512	310	373	386	316	970	130	16	Ø103	Ø40	Ø138	Ø20	Ø82	Ø53	
KCL-40022L	512	310	373	386	316	970	130	16	Ø103	Ø40	Ø138	Ø20	Ø82	Ø53	
KCL-40022H	512	310	373	386	316	970	130	16	Ø103	Ø40	Ø138	Ø20	Ø82	Ø53	
KCL-50032L	512	310	375	340	320	980	130	18	Ø118	Ø50	Ø154	Ø20	Ø82	Ø53	
KCL-50032H	512	310	375	340	320	980	130	16	Ø118	Ø50	Ø154	Ø20	Ø82	Ø53	
KCL-50052H	512	310	375	394	320	1030	130	16	Ø118	Ø50	Ø154	Ø20	Ø82	Ø53	

NO	DESCRIPTION 名稱	MATERIAL 材質	NO	DESCRIPTION 名稱	MATERIAL 材質
9-3	SPRING 彈簧	SUS HC	13S	CHECK COVER NUT 中封蓋螺絲	SUS
9-4	FRONT O-RING 前 O 環	NBR VITON	14	CHECK VALVE 單向閥	NBR EPT VITON TEFLON
9-5	PACKING 墊片	NBR VITON	15	WATER FILLING CAP AND O-RING 注水蓋附 O 環	FRPP CFRPP PVDF/VITON NBR
9-6	REAR O-RING 後 O 環	NBR VITON	16	SELF-PRIMING BARREL 自吸筒	FRPP CFRPP PVDF
10	SEAL STATION ARY RING AND O-RING 軸封固定環附 O 環	CERAMIC SIC/ NBR VITON	17	SELF-PRIMING BARREL PACKING 自吸筒墊片	NBR EPT VITON
11	IMPELLER 葉輪	FRPP CFRPP PVDF	18	FRAME 底座	FC
12	IMPELLER NUT AND O-RING 葉輪固定螺絲附 O 環	FRPP PVDF CFRPP VITON / NBR	19	COUPLING 聯軸器	FC
13	CHECK COVER 中封蓋	FRPP CFRPP PVDF	20	COUPLING RUBBER 聯軸器橡膠	NBR

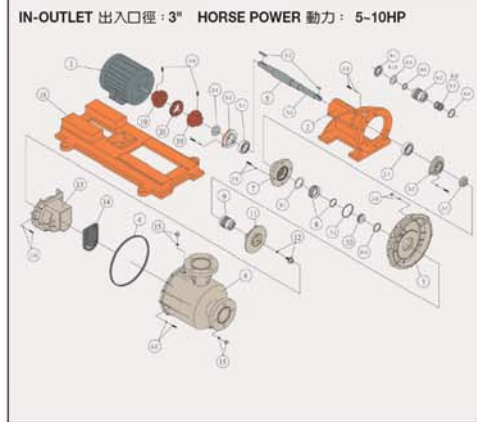

DIMENSION DRAWING

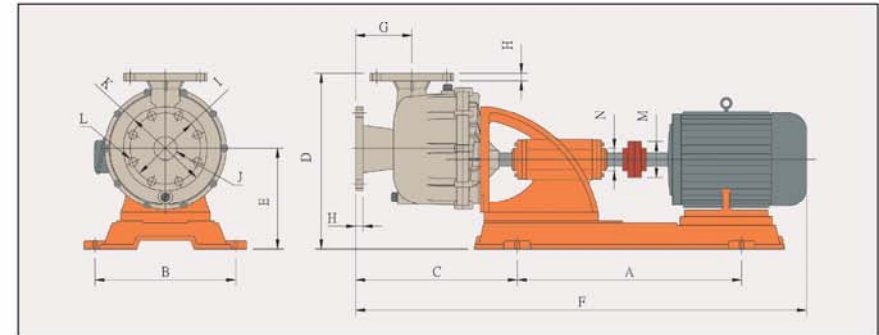

DIMENSION TABLE

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
KCL-75052H	510	310	425	390	210	1135	110	18	Ø145	Ø75	Ø185	Ø20	Ø82	Ø53	
KCL-75072H	510	310	425	390	210	1140	110	18	Ø145	Ø75	Ø185	Ø20	Ø97	Ø69	
KCL-75102H	510	310	425	390	210	1140	110	18	Ø145	Ø75	Ø185	Ø20	Ø97	Ø69	